

# Wittnauer

**DIRECT-READING**


## **ELECTRIC EYE EXPOSURE METER**

**ACCURATE EXPOSURES UNDER ALL CONDITIONS**

Your new Wittnauer exposure meter measures light — adjusts to any film — black and white or color — screws directly into Wittnauer movie camera turret.

1. Screw meter into standard "D" mount on turret.
2. Position of meter window can be changed by loosening and turning the orienting ring on the rear section of the meter. Then rotate threaded section of mount slightly — and tighten orienting ring.
3. Set speed of film being used by rotating film speed ring until proper "ASA" index appears in window.
4. Point camera at subject.
5. Read correct "F" stop — set lens. No calculations or special computations are necessary. Meter reads directly in proper "F" stops. Transfer meter reading directly to lens for accurate exposures every time.

POINTER READS DIRECTLY IN "F" STOPS

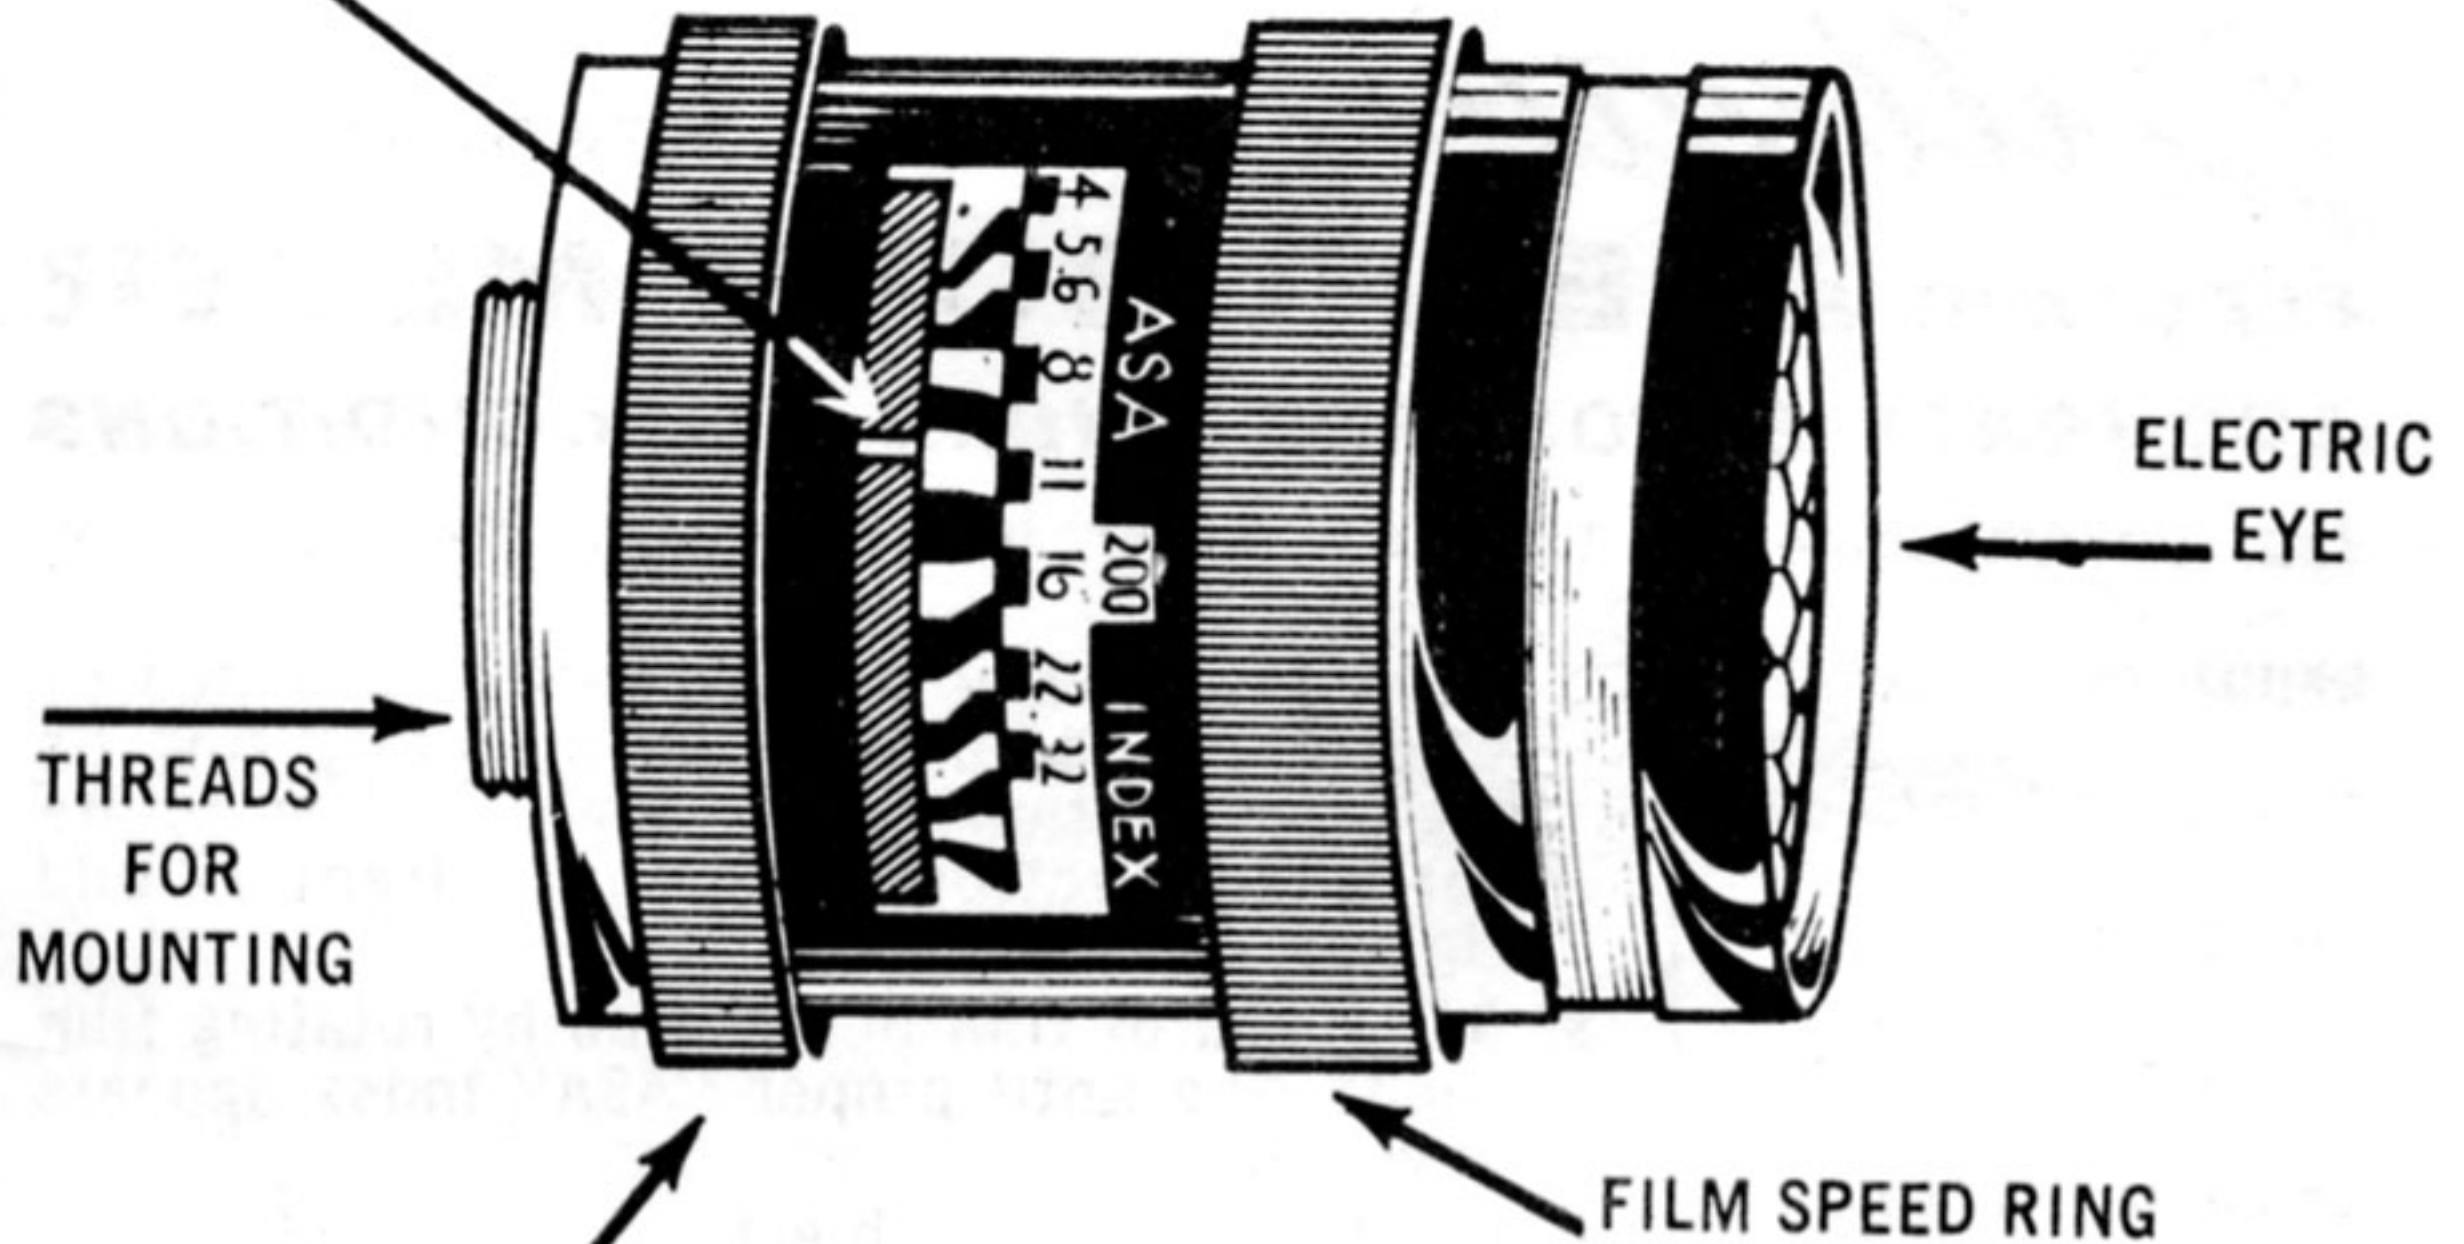

**NOTE:** Kodachrome color movie film is rated as follows:

OUTDOOR FILM	ASA-10
INDOOR FILM	ASA-16